

MasterRoc[®] MP 367 Foam

Highly reactive, two component urea-silicate foam for filling cavities

Formerly MEYCO MP 367 Foam*


Description

MasterRoc MP 367 Foam two component, solvent-free urea-silicate foam is specifically designed for rapid cavity fillings, and for coal and rock strata consolidation.

Applications

Recommended for use in:

- Filling cavities in coal and strata
- Consolidation of fractured rock, sands, gravels and coal
- Stabilization of cavities in tunnels
- Mine and ventilation seals in coal mines
- Pre-injection TBM tunnel



Features

- Neither expands its volume with water nor absorbs water
- Shows good adhesion to wet substrates
- Good chemical stability
- Predominant closed foam cells

Benefits

- Very fast reacting material, applied where foaming speed, flexibility and flame retardant properties are required

Performance Characteristics

Technical Data

	Color	Viscosity cP (mPa.s)	Density lb/ft ³ (kg/m ³)
Component A	Colorless	70 (70)	87 (1,400)
Component B	Pale Brown	170 (170)	78 (1,250)

Viscosity tested at 73 °F (23 °C). Density at 68 °F (20 °C)


Flash point: A not applicable, B > 390 °F (200 °C)

Mix ratio [A:B] : 1:1 by volume (100:89 by mass)

Technical Data


Testing temperature	73 °F (23 °C)
Start of foaming	20 ± 10 s
End of foaming	40 ± 15 s
Foam expansion factor	up to 30
Foam density	minimum 2.8 lb/ft ³ (45 kg/m ³)

Temperature Development During Foaming Reaction

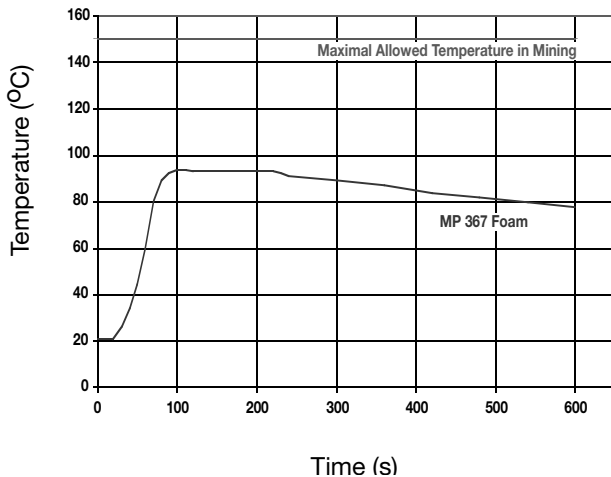

Guidelines for Use

Dosage: Components A and B are delivered ready-to-use. They are injected in the proportion of 1:1 by volume using a two component injection pump (shown below) equipped with a static in-line mixer nozzle.

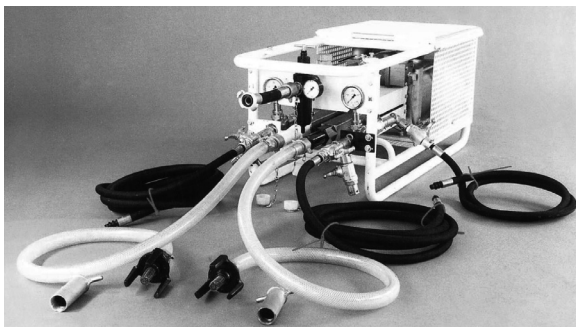

Mixing: To achieve the best mixing of the components during injection and cavity filling, the inclusion of a static in-line mixer in connection with the mixing head or in the packer is essential. The length of the static mixer should be approximately 13 in. (32 cm) for correct mixing.

Special Requirements: The curing reaction time is significantly dependant on the temperature of the polyurethane resin, and the injected strata. Store both components prior to application in warm place of at least 60 °F (15 °C).

Cleaning of Injection Equipment: For short breaks in injection, purge Component A through the in-line static mixer nozzle. After injection and prior to storage of the equipment, pump water through the injection line of Component A and clean engine oil through the pump and injection line of Component B. For cleaning, a flushing agent for polyurethane resin should be used.

Storage and Handling

Storage Temperature: If stored in dry conditions, in unopened, tightly closed original containers and within a temperature range of 40 to 95 °F (5 to 35 °C), the components of MasterRoc MP 367 Foam have a shelf life of 12 months.

Caution: Component A is frost sensitive.

Safety: Refer to the Safety Data Sheet for safety measures. Avoid contact with skin and eyes by using the required personal protective equipment, such as overalls, gloves and goggles. If contact with skin occurs, wash thoroughly using soap and water. If contact with eyes occurs, rinse thoroughly with an eyebath filled with clean water and seek medical advice. The cured products pose no health hazards.

Uncured products should be prevented from entering local drainage system and water courses.

Spillage must be collected using absorbent materials such as sawdust and sand, and disposed of in accordance with local regulations.

Packaging

MasterRoc MP 367 Foam is available in the following packaging:

- Component A:** 62.8 lb (28.5 kg) PE canisters
626 lb (284 kg) steel drums
- Component B:** 55.1 lb (25 kg) PE canisters
551 lb (250 kg) steel drums

Special packaging for coal mining upon request.

Related Documents

Safety Data Sheets: MasterRoc MP 367 Foam Component A;
MasterRoc MP 367 Foam Component B

Additional Information

For additional information on MasterRoc MP 367 Foam, contact your local sales representative.

The Admixture Systems business of BASF's Construction Chemicals division is the leading provider of solutions that improve placement, pumping, finishing, appearance and performance characteristics of specialty concrete used in the ready-mixed, precast, manufactured concrete products, underground construction and paving markets. For over 100 years we have offered reliable products and innovative technologies, and through the Master Builders Solutions brand, we are connected globally with experts from many fields to provide sustainable solutions for the construction industry.

Limited Warranty Notice

BASF warrants this product to be free from manufacturing defects and to meet the technical properties on the current Technical Data Guide, if used as directed within shelf life. Satisfactory results depend not only on quality products but also upon many factors beyond our control. BASF MAKES NO OTHER WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, INCLUDING WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE WITH RESPECT TO ITS PRODUCTS. The sole and exclusive remedy of Purchaser for any claim concerning this product, including but not limited to, claims alleging breach of warranty, negligence, strict liability or otherwise, is shipment to purchaser of product equal to the amount of product that fails to meet this warranty or refund of the original purchase price of product that fails to meet this warranty, at the sole option of BASF. Any claims concerning this product must be received in writing within one (1) year from the date of shipment and any claims not presented within that period are waived by Purchaser. BASF WILL NOT BE RESPONSIBLE FOR ANY SPECIAL, INCIDENTAL, CONSEQUENTIAL (INCLUDING LOST PROFITS) OR PUNITIVE DAMAGES OF ANY KIND.

Purchaser must determine the suitability of the products for the intended use and assumes all risks and liabilities in connection therewith. This information and all further technical advice are based on BASF's present knowledge and experience. However, BASF assumes no liability for providing such information and advice including the extent to which such information and advice may relate to existing third party intellectual property rights, especially patent rights, nor shall any legal relationship be created by or arise from the provision of such information and advice. BASF reserves the right to make any changes according to technological progress or further developments. The Purchaser of the Product(s) must test the product(s) for suitability for the intended application and purpose before proceeding with a full application of the product(s). Performance of the product described herein should be verified by testing and carried out by qualified experts.

*MEYCO MP 367 Foam became MasterRoc MP 367 Foam under the Master Builders Solutions brand, effective October 1, 2013.

© BASF Corporation 2013 ■ 10/13 ■ UGC-DAT-0402