

MasterLife[®] SF 100 (formerly MasterLife SF 100)

Silica fume mineral admixture

DESCRIPTION

MasterLife SF 100 is a dry, compacted, silica fume mineral admixture formulated to produce concrete with special performance qualities. It improves the hardened characteristics of concrete in two main ways.

Firstly, **MasterLife SF 100** is a pozzolan which reacts chemically within the concrete to increase the amount of calcium silicate hydrate gel formed, thus improving the strength and impermeability of the concrete. Secondly, **MasterLife SF 100** is an ultra-fine material that, when added to concrete, physically fills the voids between cement particles resulting in an extremely dense and impermeable concrete. **MasterLife SF 100** meets AS/NZS 3582.3 Amorphous Silica and ASTM C 1240 requirements.

RECOMMENDED USES

The reduced permeability of concrete produced with **MasterLife SF 100** greatly limits the ingress of water, chlorides, sulphates, and aggressive chemicals known for promoting reinforcing steel corrosion and other distress in the concrete. This makes **MasterLife SF 100** an ideal product for use in basement structures, parking decks, bridge decks, marine structures, and any construction that requires the protection provided by impermeable concrete.

Because of its pozzolanic and void-filling properties, the addition of **MasterLife SF 100** to conventional concrete can also provide ultra-high compressive strengths. This allows for design flexibility, resulting in reduced member size, increased span lengths, and improves overall structural economics.

As a result of the preceding advantages, **MasterLife SF 100** will improve performance in wet and dry shotcrete, prestressed, precast, and ready-mixed concrete applications.

When air entrainment is desired, an air-entraining admixture is recommended. Please consult your local BASF Technical Sales Representative. It is also recommended that **MasterLife SF 100** be used in conjunction with a high range, water-reducing admixture, such as Rheobuild or Glenium admixtures for maximum workability while maintaining a low water-cementitious ratio.


FEATURES AND BENEFITS

MasterLife SF 100 aids in the production of concrete with the following special qualities:


- Dramatically improved durability
- Uniformly high compressive strength
- Abrasion and erosion protection
- Better flexural strengths at all ages
- Low permeability
- Excellent freeze/thaw resistance

TYPICAL PERFORMANCE DATA

Example of the influence of **MasterLife SF 100** on rapid chloride permeability.

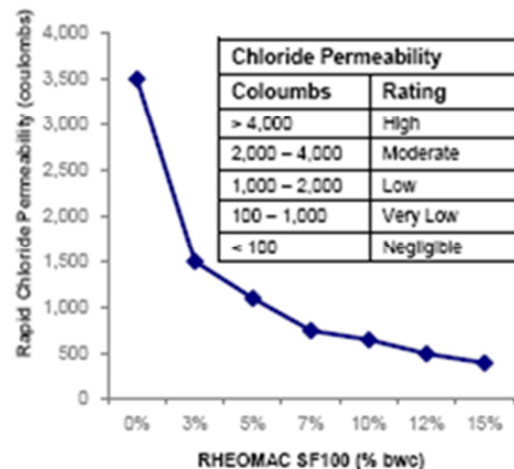

Compressive Strength (MPa)

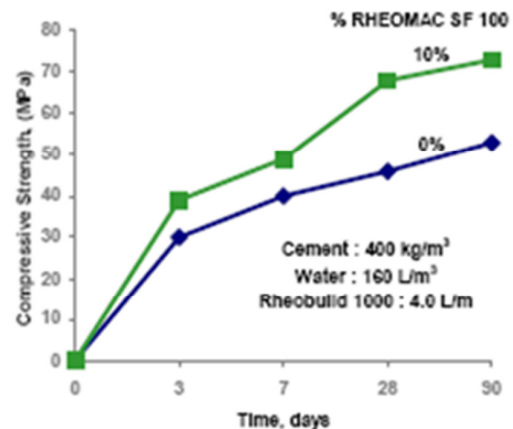



The Chemical Company

MasterLife[®] SF 100 (formerly MasterLife SF 100)

HOW IT WORKS

MasterLife SF 100 silica fume is a micro-filling material that physically fills the voids between cement particles. **MasterLife SF 100** silica fume dramatically lowers concrete permeability and reduces the size and number of capillaries that allow contaminants to enter concrete.

As a pozzolan, **MasterLife SF 100** silica fume reacts chemically within concrete to increase the amount of calcium silicate hydrate (CSH) that is formed. CSH is the bonding agent that holds concrete together.

The additional CSH significantly increases the compressive strength and decreases the permeability of concrete.

COMPATABILITY

MasterLife SF 100 silica fume can be used with Portland cements approved under AS, NZS, AS/NZS and similar international standards and specifications. It is compatible with most concrete admixtures, including all BASF Construction Chemicals admixtures.

MasterLife SF 100 silica fume is recommended for use in combination with high-range water-reducers, such as Rheobuild and Glenium admixtures, for maximum workability while maintaining a low water-cementitious materials ratio.

RATE OF HARDENING

Setting time of concrete is influenced by the chemical and physical composition of the cement and/or cement type used to produce the concrete, temperature of the concrete, weather conditions, and the use of chemical admixtures. Trial mixes should be made with the job materials to determine the setting time of a specific mixture.

MasterLife SF 100 silica fume will not initiate or promote corrosion of reinforcing steel embedded in concrete, prestressed concrete or concrete placed on galvanized steel floor and roof systems. Neither calcium chloride nor any chloride based ingredients are used in the manufacture of **MasterLife SF 100** silica fume.

DISPENSING

MasterLife SF 100 is batched at the ready-mix plant in a manner similar to cement or other cementitious materials such as fly ash and granulated slag. **MasterLife SF 100** is supplied in

biodegradable bags and can be placed directly into the agitator. It is recommended that **MasterLife SF 100** be used with a BASF Construction Chemicals high-range water reducer in order to provide maximum workability while maintaining the desired low water/cement ratio.

Note : For directions on the proper use of **MasterLife SF 100** in specific applications, contact your local BASF Technical Sales Representative.

DOSAGE

MasterLife SF 100 is recommended for use at an addition rate of 5 to 15% by weight of cement, depending on the amount of strength increase or impermeability desired. The exact amount for strength or durability requirements should be determined by trial batches using project materials.

The above addition rate applies to most concrete mixes using average concrete ingredients. However, variations in the job conditions and concrete materials may make an amount outside the recommended range desirable. In such cases, contact your local BASF Technical Sales Representative.

PACKAGING

MasterLife SF 100 is supplied in 10kg degradable bags and 960kg bulk bags.

SHELF LIFE

Keep only in the original container in a cool, dry, well-ventilated place away from ignition sources, heat or flame. Protect from direct sunlight.

MasterLife SF 100 has a shelf life of 12 months.

PRECAUTIONS

For the full health and safety hazard information and how to safely handle and use this product, please make sure that you obtain a copy of the BASF Material Safety Data Sheet (MSDS) from our office or our website.



The Chemical Company

MasterLife[®] SF 100 (formerly MasterLife SF 100)

ARmacSF100/2/0713

STATEMENT OF RESPONSIBILITY The technical information and application advice given in this BASF publication are based on the present state of our best scientific and practical knowledge. As the information herein is of a general nature, no assumption can be made as to a product's suitability for a particular use or application and no warranty as to its accuracy, reliability or completeness either expressed or implied is given other than those required by law. The user is responsible for checking the suitability of products for their intended use.

NOTE Field service where provided does not constitute supervisory responsibility. Suggestions made by BASF either orally or in writing may be followed, modified or rejected by the owner, engineer or contractor since they, and not BASF, are responsible for carrying out procedures appropriate to a specific application.

BASF Australia Ltd ABN 62008437867 Construction Chemicals Division 11 Stanton Road Seven Hills, NSW 2147	Sales Offices: Sydney, Brisbane, Melbourne, Adelaide, Perth Freecall: 1300 227 300	BASF Emergency Advice: 1800 803 440 within Australia (24hr) 0800 944 955 within New Zealand
--	---	--

BASF New Zealand Ltd 45 William Pickering Drive, Albany, Auckland, Phone: 0800 334 877

BASF WEB SITES www.basf-cc.com.au www.basf-cc.co.nz