

MasterSeal® 930

Sealing system for irregular and unconventional joints

DESCRIPTION

MasterSeal 930 joint sealing system consists of two products - **MasterSeal 930** tape and **MasterBrace 1446 or 1444** epoxy. The **MasterSeal 930** tape is a highly elastic, rot-proof and chemically resistant sealing tape. **MasterBrace 1446 or 1444** is a two-part epoxy compound which establishes a strong bond to various types of substrate.

RECOMMENDED USES

Sealing of construction joints, expansion joints, connecting joints, cracks and crevices to ensure a long-term waterproof and functional building envelope.

Typical uses are for concrete tanks, cast and cement-pipe connections, bridge decks, tunnels, water towers and reservoirs, ponds, silos, containers, secondary tanks. **MasterSeal 930** can be applied on dry or slightly humid substrates. It is ideal for joints with very large expansion or irregular, broken joint flanks. **MasterSeal 930** is grey coloured, weather and waterproof.

FEATURES AND BENEFITS

- Durable
- Long lasting elasticity, even at low temperatures
- Root resistant
- Cost effective
- Approved for use with potable water
- Easy to apply
- User friendly heat welding tape overlaps
- Can be applied horizontally, vertically and even overhead

PROPERTIES

Shore Hardness A (ISO 868)	ca.80
Tensile strength (EN ISO 527-1)	> 6 N/mm ²
Elongation at break (EN ISO 527-1)	> 400%

APPLICATION

Surface Preparation

Contact surfaces must be clean and free from dust, grease, water, oil, and other contaminants impairing adhesion. Concrete should be at least 4 weeks old. In order to provide maximum adhesion, concrete surfaces should be mechanically abraded.

Application

To provide a 'base coat' of epoxy adhesive, apply the **MasterBrace 1446 or 1444** on both sides along the joint or crack on the prepared substrate, preferably with a notched trowel or spatula. Layer thickness should be about 1-2mm. When sealing cracks or narrow joints the **MasterSeal 930** tape should not be bonded along the centre line of the tape. A minimum unbonded width of 20mm is recommended to allow for expansion and contraction.

Wipe the edges of the tape with **MasterSeal 930** Cleaner then place the clean and well-aired tape immediately into the adhesive layer and press well in with a roller (for very wide joints draw the tape suitably into the joint so that a hollow is formed).

Apply the **MasterBrace 1446 or 1444** 'top coat' wet-on-wet with the 'base coat' ensuring the edge of the **MasterSeal 930** tape is completely covered with **MasterBrace 1446 or 1444** to a thickness of 2-3mm.

Notes:

- By warming up the membrane, it can be stretched over slight irregularities of the substrate. The same method can be used in case of corners, cavities, pipe crossing.
- In the case of negative water pressure, back up the membrane with an adequate support eg steel sheet.
- If individual tapes need to be connected into longer pieces (also T-pieces etc) they can easily be joined using an appropriate heat welder as per the following:

1. Provide an overlap of 30mm.
2. Cut the tape to size where required.
3. Round the corners of the top tape.
4. Prepare the bottom tape thoroughly with an abrasive pad (grit size 150) to a minimum width of 30mm.
5. Clean bottom tape thoroughly to remove any dirt.
6. Prepare the underside of the top tape as per steps 4 and 5.
7. Using the heat welder, spot fix along the width of the tape joint to provide initial bond.
8. Final weld the joint along the complete width of the tape, using a narrow roller to ensure full adhesion between the top and bottom tapes.

MasterSeal® 930

9. Welding temperatures – 1mm thickness = approx 270 C (or 4 on the Leister Triac); 2mm thickness = approx 360 C (or 5.5 on the Leister Triac).

PACKAGING





MasterSeal 930 is available in a range of widths in either:

1mm x 20m or 2mm x 20m

STORAGE

Store **MasterSeal 930** well protected against sunlight at ambient temperature in dry conditions.

- 1: MasterSeal 930
- 2: MasterBrace 1446 or 1444
- 3: MasterEmaco T 545 or similar
- 4: Bearing

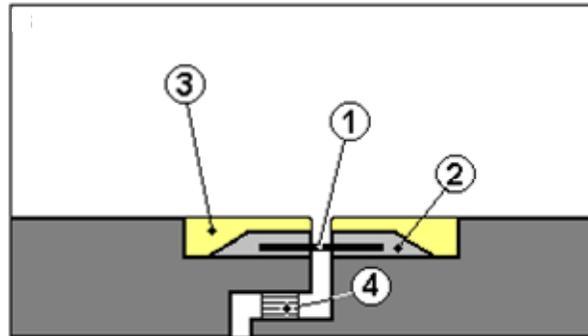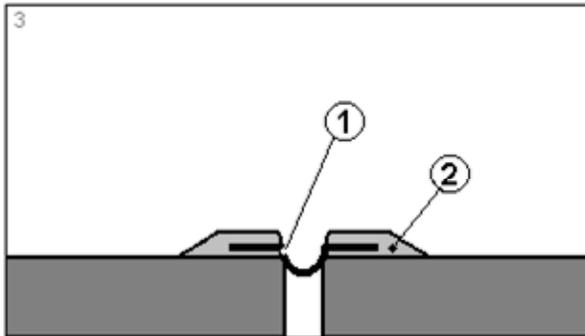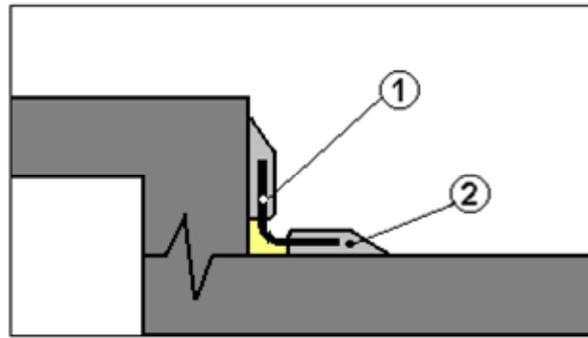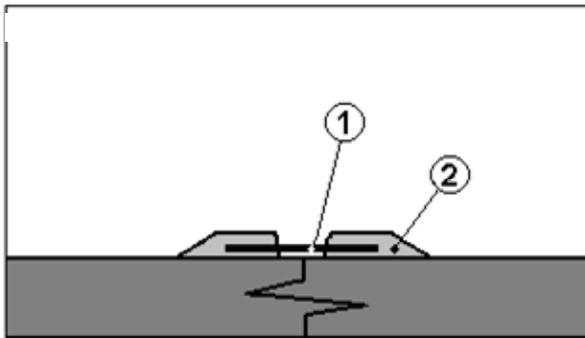

MasterSeal-930-ANZ-V2-1117

STATEMENT OF RESPONSIBILITY

The technical information and application advice given in this BASF publication are based on the present state of our best scientific and practical knowledge. As the information herein is of a general nature, no assumption can be made as to a product's suitability for a particular use or application and no warranty as to its accuracy, reliability or completeness either expressed or implied is given other than those required by law. The user is responsible for checking the suitability of products for their intended use.

NOTE

Field service where provided does not constitute supervisory responsibility. Suggestions made by BASF either orally or in writing may be followed, modified or rejected by the owner, engineer or contractor since they, and not BASF, are responsible for carrying out procedures appropriate to a specific application.

BASF Australia Ltd
 ABN 62008437867
 Level 12
 28 Freshwater Place
 Southbank VIC 3006
Freecall: 1300 227 300
www.master-builders-solutions.basf.com.au

BASF New Zealand Ltd
 Level 4, 4 Leonard Isitt Drive
 Auckland Airport 2022
 Auckland, New Zealand
Freecall: 0800 334 877
www.master-builders-solutions.basf.co.nz

BASF Emergency Advice:
 1800 803 440 within Australia (24hr)
 0800 944 955 within New Zealand