

MasterLife[®] SRA 872SA

Shrinkage reducing admixture

DESCRIPTION

MasterLife SRA 872SA shrinkage-reducing admixture was developed specifically to reduce drying shrinkage of concrete and mortar, and the potential for subsequent cracking.

MasterLife SRA 872SA admixture functions by reducing capillary tension of pore water, a primary cause of drying shrinkage.


FIELDS OF APPLICATION

Recommended for use in:

- Ready-mixed or precast concrete structures requiring shrinkage reduction and long term durability
- Wet mix shotcrete
- Mortars and grouts

FEATURES AND BENEFITS

- Reduces drying shrinkage cracking and microcracking thereby improving aesthetics, watertightness and durability
- Reduction in drying shrinkage minimizes prestress loss
- Minimizes curling
- Significantly reduces drying shrinkage by as much as 80% at 28 days, and up to 50% at one year and beyond
- Reduces stresses induced from one-dimensional surface drying in concrete slabs and floors
- Reduces carbonation
- Can increase setting time from 1 to 2 hours, link to the dosage and temperature

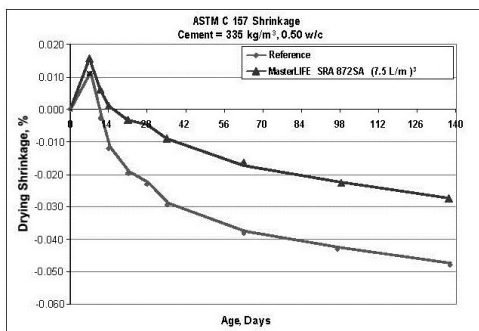

PACKAGING

MasterLife SRA 872SA is available in 210 litre drums and 1,000 litre IBC.

TYPICAL PROPERTIES*

Appearance	Transparent liquid
Specific gravity @25°C	1.01
Chloride content	"chloride-free" to EN 934

DOSAGE

Guidelines for use

Dosage: knowledge of the shrinkage characteristics of the concrete mixture proposed for use is required prior to the addition of **MasterLife SRA 872SA** admixture. The dosage of **MasterLife SRA 872SA** admixture will be dependent on the desired drying shrinkage and the reduction in drying shrinkage required. Therefore, it is strongly recommended that drying shrinkage testing be performed to determine the optimum dosage for each application and each set of materials.

The typical dosage range of **MasterLife SRA 872SA** admixture is 1 to 8% of cement weight. However, dosages outside of this range may be required depending on the level of shrinkage reduction needed.

MIXING

MasterLife SRA 872SA admixture may be added to the concrete mixture during the initial batch sequence or at the jobsite.

The mix water content should be reduced to account for the quantity of **MasterLife SRA 872SA** admixture used.

MasterLife[®] SRA 872SA

STORAGE

MasterLife SRA 872SA should be stored at ambient temperatures above +2°C and MAXIMUM +50°C, precautions should be taken to protect the admixture from freezing.

If **MasterLife SRA 872SA** admixture freezes thaw and reconstitute by mild mechanical agitation.

Do not use pressurized air for agitation.

SHELF LIFE

The shelf life is 12 months when stored as above.

COMPATABILITY

MasterLife SRA 872SA is typically used with other BASF Admixtures and is compatible with those from the **MasterPozzolith**, **MasterRheobuild**, **MasterPolyheed** and **MasterGlenium** ranges. All admixtures should be dispensed separately and never pre mixed.

MasterLife SRA 872SA is compatible with all types of Portland Cement including Sulphate Resisting and cementitious materials such as GGBS, Fly Ash and Micro Silica.

NOTE

Field service, where provided, does not constitute supervisory responsibility. For additional information contact your local BASF representative.

BASF reserves the right to have the true cause of any difficulty determined by accepted test methods.

QUALITY AND CARE

All products originating from BASF's Dubai, UAE facility are manufactured under a management system independently certified to conform to the requirements of the quality, environmental and occupational health & safety standards ISO 9001, ISO 14001 and ISO 45001.

* Properties listed are based on laboratory controlled tests.

® = Registered trademark of the BASF-Group in many countries.

BASF_CC-UAE/MLife_SRA872SA_03_17/v1/

STATEMENT OF RESPONSIBILITY

The technical information and application advice given in this BASF publication are based on the present state of our best scientific and practical knowledge. As the information herein is of a general nature, no assumption can be made as to a product's suitability for a particular use or application and no warranty as to its accuracy, reliability or completeness either expressed or implied is given other than those required by law. The user is responsible for checking the suitability of products for their intended use.

NOTE

Field service where provided does not constitute supervisory responsibility. Suggestions made by BASF either orally or in writing may be followed, modified or rejected by the owner, engineer or contractor since they, and not BASF, are responsible for carrying out procedures appropriate to a specific application.