


# MasterSeal® 754IC

## Inside Corner accessory for MasterSeal 754

### DESCRIPTION

**MasterSeal 754IC** is a special self-adhesive inside corner accessory, which is covered on the sides and on top with additional butyl stripes.

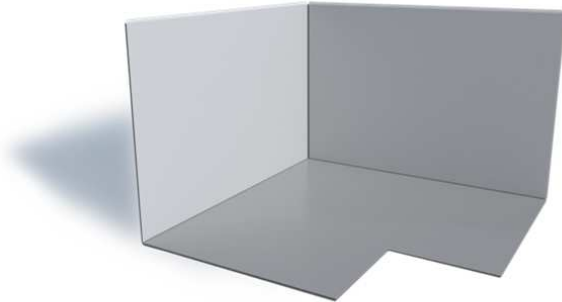

Inside corner

### FIELDS OF APPLICATIONS

**MasterSeal 754IC** is an accessory which is used with **MasterSeal 754** pre-applied waterproofing applications on horizontal direction at critical points.

Sealing for construction inside corners in conjunction with **MasterSeal 754**.

### FEATURES & BENEFITS

- Provides easy application in the corner points.
- Self-adhesive
- Waterproof
- Easy to apply with pre-cut release liner
- Combines perfectly with **MasterSeal 754** membrane.

### PHYSICAL / CHEMICAL PROPERTIES\*

Material composition	Membrane – FPO - Flexible Polyolefin Self-adhesive strip - Butyl rubber, high elastic, resistant to ageing with release foil
Material weight	102g/piece (with release foil)
Resistance to temperature	-30°C to 60°C
Burst pressure max. DIN Internal	>1.5 bar
Chemical resistance	Resistant to a wide range of chemical liquids

### PACKAGING

**MasterSeal 754IC** is supplied as 1.3mm thick (with release foil) 100mm height and 150mm side length.

**MasterSeal 754IC** is supplied in full box of 25 pieces each.

### COLOUR

Grey

### APPLICATION PROCEDURE

In horizontal pre-applied membrane applications, primarily **MasterSeal 754IC** is placed in the corner. Protection foil is removed from the accessory. **MasterSeal 754** is combined with self-adhesive surface of **MasterSeal 754IC**.

### COVERAGE

Application requirements can vary according to the total consumption of the project. Please contact BASF Technical Services department

### STORAGE & SHELF LIFE

**MasterSeal 754IC** accessory has a shelf- life of 12 months from date of production if stored properly in unopened, undamaged, original packaging in dry conditions and at temperatures between +5°C and +30°C.

# MasterSeal<sup>®</sup> 754IC

## NOTE

Field service, where provided, does not constitute supervisory responsibility. For additional information contact your local BASF representative.

BASF reserves the right to have the true cause of any difficulty determined by accepted test methods.

## QUALITY AND CARE

All products originating from BASF's Dubai, UAE facility are manufactured under a management system independently certified to conform to the requirements of the quality, environmental and occupational health & safety standards ISO 9001, ISO 14001 and ISO 45001.

\* Properties listed are based on laboratory controlled tests.

® = Registered trademark of the BASF-Group in many countries.

BASF\_CC-UAE/SI\_754IC\_04\_17/v1/

## STATEMENT OF RESPONSIBILITY

The technical information and application advice given in this BASF publication are based on the present state of our best scientific and practical knowledge. As the information herein is of a general nature, no assumption can be made as to a product's suitability for a particular use or application and no warranty as to its accuracy, reliability or completeness either expressed or implied is given other than those required by law. The user is responsible for checking the suitability of products for their intended use.

## NOTE

Field service where provided does not constitute supervisory responsibility. Suggestions made by BASF either orally or in writing may be followed, modified or rejected by the owner, engineer or contractor since they, and not BASF, are responsible for carrying out procedures appropriate to a specific application.