


MasterSeal[®] 946

TPO laminated metal sheet

DESCRIPTION

MasterSeal 946 is made of galvanized steel coupled with TPO membrane.

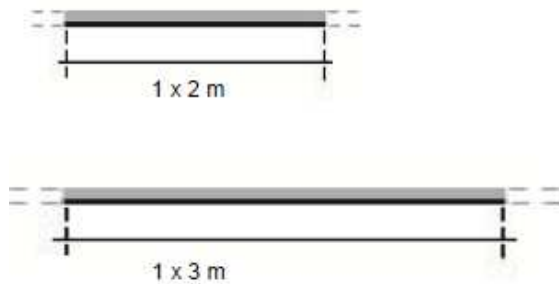

USES

MasterSeal 946 is used for the realization of flashings or profiles made to size for use in roofing as finishing elements in waterproofing systems realized with TPO synthetic membranes.

ADVANTAGES

- Resistant to weathering and UV

PACKAGING

MasterSeal 946 is supplied as:

Weight	5.5kg/m ²
Length	2m / 3m
Colour	Sand Grey

DIMENSION

Width	1 m
Length	2m / 3 m
Total Thickness	1.8mm
- Metal sheet thickness	0.6mm
- TPO membrane thickness	1.2mm

APPLICATION PROCEDURE

For application details, please refer to the TPO membrane system method statement / manual or contact BASF Technical Services department.

NOTE

Field service, where provided, does not constitute supervisory responsibility. For additional information contact your local BASF Construction Chemicals representative.

BASF reserves the right to have the true cause of any liability determined by accepted test methods.

QUALITY AND CARE

All products originating from BASF's Dubai, UAE facility are manufactured under a management system independently certified to conform to the requirements of the quality, environmental and occupational Health & Safety standards ISO 9001, ISO 14001 and ISO 45001.

* Properties listed are based on laboratory controlled tests.

® = Registered trademark of the BASF-Group in many countries.



We create chemistry

MasterSeal[®] 946

BASF_CC-UAE/SI_946_03_18/v1/

STATEMENT OF RESPONSIBILITY

The technical information and application advice given in this BASF publication are based on the present state of our best scientific and practical knowledge. As the information herein is of a general nature, no assumption can be made as to a product's suitability for a particular use or application and no warranty as to its accuracy, reliability or completeness either expressed or implied is given other than those required by law. The user is responsible for checking the suitability of products for their intended use.

NOTE

Field service where provided does not constitute supervisory responsibility. Suggestions made by BASF either orally or in writing may be followed, modified or rejected by the owner, engineer or contractor since they, and not BASF, are responsible for carrying out procedures appropriate to a specific application.

BASF Construction Chemicals UAE LLC
P.O. Box 37127, Dubai, UAE
Tel: +971 4 8090800, Fax: +971 4 8851002
www.master-builders-solutions.basf.ae

Disclaimer: the LRQA mark relates to certified management system and not to the product mentioned on this datasheet



MASTER[®]
» BUILDERS
SOLUTIONS