

MasterPozzolith® 322

Concrete improving admixture

DESCRIPTION

MasterPozzolith 322 is a ready-to-use liquid admixture for producing better, more uniform quality concrete. It reduces the quantity of mixing water required to produce concrete of a given consistency, with greater economy for a given strength.

MasterPozzolith 322 has been formulated to meet the requirements of ASTM C494 for Type A and Type D admixture.

MasterPozzolith 322 is compatible with all cements meeting recognised international standards.

RECOMMENDED USES

- improving pumped concrete, shotcrete (wet mix) and conventionally placed concrete.
- improving plain, reinforced, precast, prestressed, lightweight or normal weight concrete.
- use in concrete where normal and retarded setting characteristics and improved performance are desired.

FEATURES AND BENEFITS

- Good workability** - Good finishing characteristics for slab work and off-form surfaces.
- Good water reduction** - Better concrete strength.
- Good cohesion** - Reduces segregation particularly in lean mixes and high slump concrete.

TYPICAL PERFORMANCE DATA

In comparison to plain concrete, a mix containing **MasterPozzolith 322** develops higher early and ultimate strengths while having normal or retarded setting characteristics.

APPLICATION

Dispensing

MasterPozzolith 322 can be added into the mixing water, or can be added to the wet concrete after the mixing water has been added. The addition of **MasterPozzolith 322** to a dry concrete mix is not recommended. A separate dispenser and feed line must be used.

MasterPozzolith 322 can be added to the concrete with mixing water.

DOSAGE


MasterPozzolith 322 is normally used at the rate of 350 - 550ml per 100kg of cement. Other dosages may also be used depending on the specific working conditions.

Consult a local BASF Construction Chemicals field representative for assistance in determining the dosage.

PACKAGING

MasterPozzolith 322 is available in bulk and 205L

STRENGTH AND SETTING TIME PERFORMANCE

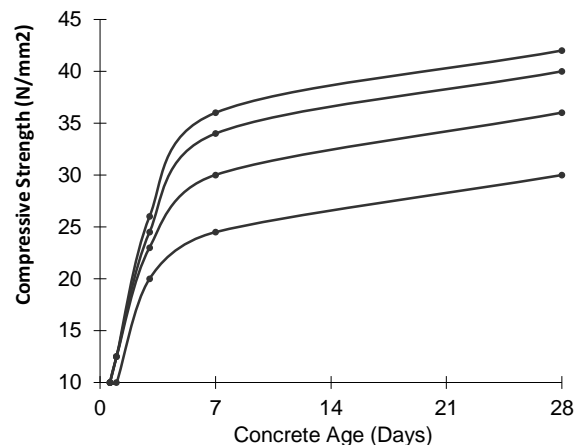

drums

SHELF LIFE

MasterPozzolith 322 can be stored for 12 months if stored at temperatures above 5°C, in tightly sealed original drums. If found to be frozen, thaw it and reconstitute by stirring.

PRECAUTIONS

Health: MasterPozzolith 322 does not contain any hazardous substances requiring labelling.

It is safe for use with standard precautions followed in the construction industry, such as use of hand gloves, safety goggles, etc.

For detailed Health, Safety and Environmental Recommendations, please consult and follow all instructions on the product Material Safety Data Sheet.



We create chemistry

MasterPozzolith[®] 322

® = registered trademark of BASF group in many countries

MY# MasterPozzolith 322 asean v1.1016

STATEMENT OF RESPONSIBILITY

The technical information and application advice given in this BASF Construction Chemicals publication are based on the present state of our best scientific and practical knowledge. As the information herein is of a general nature, no assumption can be made as to a product's suitability for a particular use or application and no warranty as to its accuracy, reliability or completeness either expressed or implied is given other than those required by law. The user is responsible for checking the suitability of products for their intended use.

NOTE

Field service where provided does not constitute supervisory responsibility. Suggestions made by BASF Construction Chemicals either orally or in writing may be followed, modified or rejected by the owner, engineer or contractor since they, and not BASF Construction Chemicals, are responsible for carrying out procedures appropriate to a specific application.

BASF Construction Chemicals offices

Singapore

Tel :+65-6861-6766
Fax :+65-6861-3186

Malaysia

Tel :+60-3-5628-3888
Fax :+60-3-5628-3776

Indonesia

Tel :+62-21-526-2481
Fax :+62-21-526-2493

Thailand

Tel :+66-2769-8564
Fax :+66-2769-8584

Vietnam

Tel :+84-650-3743-100
Fax :+84-650-3743-200

Philippines

Tel :+63-2-811-8000
Fax :+63-2-838-1025

Website : www.master-builders-solutions.asiapacific.basf.com