


MasterTop 1325 R

Comfort polyurethane system, slip resistant, matt or satin matt, low emission
Fields of application: crack bridging, noise deadening and sound absorbing indoor floor where a large degree of comfort is required: for example offices, exhibitions and fair grounds, cafeterias, restaurants, schools etc.

Consumption:

<input checked="" type="checkbox"/>	Primer	MasterTop P 617 (or P 615 without broadcast) EP, 2-component, non-solvented (total solid)	0,3-0,5 kg/m ²
	Sand broadcast	Oven dried silica sand, size Ø 0,3-0,8 mm, uniformly applied, not in excess	0,8-1,0 kg/m ²
<input type="checkbox"/>	Optional/ Scratch primer up to 1 mm	MasterTop P 617 (or P 615 without broadcast) EP, 2-component, non-solvented (total solid) 1 : 0,5 filled with oven dried silica sand, size Ø 0,1-0,3 mm	0,6-1,0 kg/m ² *
	Sand broadcast	oven dried silica sand, size Ø 0,3-0,8 mm	2,0-3,0 kg/m ²
<input type="checkbox"/>	Optional/ Pore sealer**	MasterTop BC 325N pigmented, PU, 2-component, non-solvented, 1 : 0,3 filled with oven dried silica sand, size Ø 0,1-0,3 mm	0,8-1,0 kg/m ² *
<input checked="" type="checkbox"/>	Body coat	MasterTop BC 325N pigmented, PU, 2-component, non-solvented, 1 : 0,3 filled with oven dried silica sand, size Ø 0,1-0,3 mm	2,5-3,0 kg/m ² *
<input checked="" type="checkbox"/>	Top coat/ Option 1 <i>By light colours at least two applications are necessary</i>	MasterTop TC 417W (pigmented) pigmented, PU, 2-component, water borne, non-solvented, low emission, UV-stable, matt, slip resistant, filled with 3-5 % glass beads Ø 53-106 µm	0,10-0,12kg/m ²

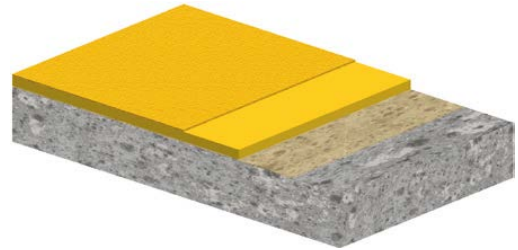

MasterTop 1325 R

Comfort polyurethane system, slip resistant, matt or satin matt, low emission

**Total thickness
of the system** ca. 2,0-2,5 mm

Remark: Consumptions are indicative and may be higher, depending on substrate roughness, temperature and porosity, as well as waste produced during application.


* Consumption incl. filler

** Pore sealer on sand broadcasted, porous and absorbent surfaces

The flooring system fulfills, as minimum requirements, the following properties and technical data determined by internal and external testing:

DIBt General technical approval **Z-156.605-686** according to DIN EN 13813:2003-1 for an utilization indoor in public areas with Health-related Evaluation Procedure for Volatile Organic Compounds Emissions (VOC and SVOC).


EN 13813	SR-B1,5-AR1-IR4- Bfl-s1
Emissions behavior	AgBB conform AFSSET conform A+ classification
Crack bridging at 23°C	Class A 4 according to DIN EN 1062-7 requirement > 1250 µm, result = 2000 µm
Slip resistance	R10 with MasterTop TC417W + Ballotini
Elongation (DIN 53504)	150 %
Impact sound reduction According to ISO 717-2	with 2-2,5 mm = 2 dB, with 4 mm = 4 dB
Fire behavior	Bfl-s1 (according to DIN EN 13501-1)

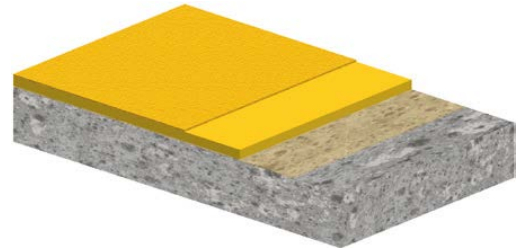

MasterTop 1325 R


Comfort polyurethane system, slip resistant, matt or satin matt, low emission

CE marking according to EN 13813

	
BASF Coatings GmbH Donnerschweer Str. 372, D-26123 Oldenburg	
09	
132503	
EN 13813: 2002	
EN 13813: SR-B1,5-AR1-IR4	
Synthetic resin screed for internal uses	
Essential characteristics	Performance
Fire behavior	Bfl-s1
Release of corrosive substances	SR
Water permeability	NPD
Wear resistance	< AR 1
Bond strength	> B 1,5
Impact resistance	> IR 4
Impact sound insulation	NPD
Sound absorption	NPD
Heat insulation	NPD
Chemical resistance	NPD
Slip/Skid resistance	R10
Emissions behavior	Ü-Z: Z-156.605-686

NPD = No performance determined

Performance determined in System build-up **MasterTop 1325 R**

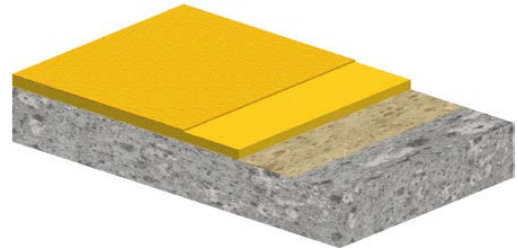

MasterTop 1325 R

Comfort polyurethane system, slip resistant, matt or satin matt, low emission

CONTACT

Should you require any further information, please do not hesitate to contact your local sales consultant or take directly contact with us:

Performance Flooring

BASF Construction Chemicals Europe AG

Hardmatt 434

CH-5082 Kaisten

Tel: +41 62 868 93 60

Fax: +41 62 868 93 59

BASF Coatings GmbH

Donnerschweer Str. 372

D-26123 Oldenburg

Tel: +49 441 3402 251

Fax: +49 441 3402 333

Mitglied der



Disclaimer:

In view of widely varying site conditions and fields of application of our products, this technical data sheet is meant to provide general application guidelines only. This information is based on our present knowledge and experience. The customer is not released from the obligation to conduct careful testing of suitability and possible application for the intended use. The customer is obliged to contact the technical help-line for fields of application not expressly stated in the technical data sheet under "Fields of Application". Use of the product beyond the fields of application as stated in the technical data sheet without previous consultation with BASF and possible resulting damages are in the sole responsibility of the customer.

All descriptions, drawings, photographs, data, ratios, weights i.e. stated herein can be changed without advance notice and do not represent the condition of the product as stipulated by contract. It is the sole responsibility of the recipient of our products to observe possible proprietary rights as well as existing laws and provisions. The reference of trade names of other companies is no recommendation and does not exclude the use of products of similar type. Our information only describes the quality of our products and services and is no warranty. Liability is accepted for incomplete or incorrect particulars in our data sheets only in the event of intent or gross negligence, without prejudice to claims under product liability laws.