

MasterRoc[®] MP 364 Flex

Formerly MEYCO MP 364 Flex

Highly reactive, two component fire resistant polyurea silicate injection resin for ground consolidation

Product description

MasterRoc MP 364 Flex is a two component, solvent-free polyurea silicate injection resin specifically designed for rapid ground consolidation.

Fields of application

- Consolidation of fractured rock in underground structures
- Consolidation of coal in development roadways and longwalls
- Repair of concrete cracks
- Also suitable for underwater application

Features and benefits

- Compressive strength of 34 MPa.
- Adhesion to concrete of 3.6 MPa.
- Penetrates cracks wider than 0.14 mm.
- Neither expands its volume with water nor absorbs water.
- Injected material shows good adhesion to wet and low friction substrates.
- Equally fast reaction in dry or underwater conditions.
- High structural strength combined with flexibility.
- Fire resistant (according to DIN4102-B2).

Packaging

Part A: 36 kg cans and 298 kg drums
Part B: 28.5 kg cans and 236 kg drums

Technical data

	Color	Viscosity mPa.s	Density kg/dm ³
Part A	Colorless	425	1.47
Part B	Dark brown	180	1.18

Tested at 23°C


Mixing ratio Part A to B: 1 to 1 by volume

Reaction characteristics

Testing temp.	23°C
Flow time	90s ± 30s
Setting time	2min30s ± 30s
Foam expansion factor	1
Compressive strength	34 MPa
Adhesion to concrete	3.6 MPa
Border time	< 5 min

Border time: time needed to reach 1 MPa adhesion strength under lab conditions

Reaction temperature

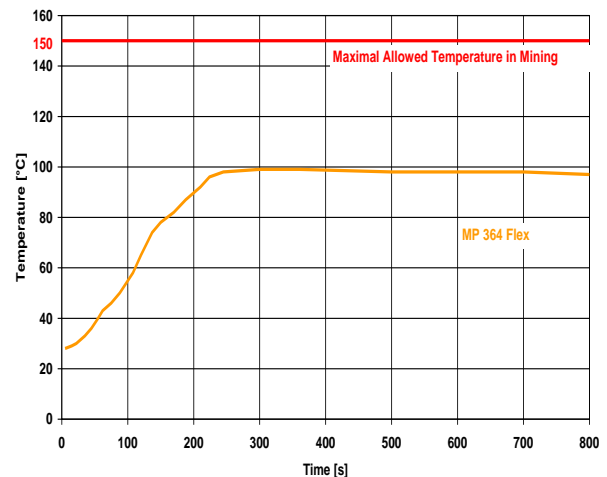

Application procedure


Part A and B are delivered ready to use. They are injected in the proportion of 1:1 by volume, using a two component injection pump equipped with a static in-line mixer nozzle, as shown in the following picture.



We create chemistry

MasterRoc[®] MP 364 Flex

Formerly MEYCO MP 364 Flex

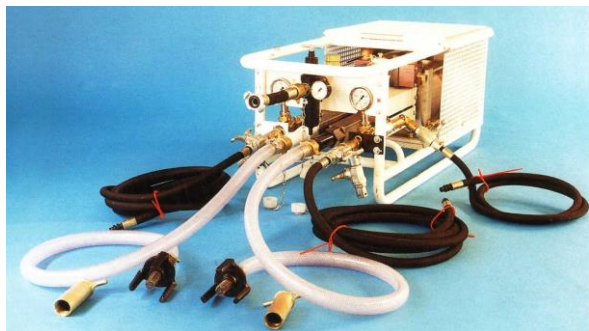

Please note: The curing reaction time is significantly dependent on the temperature of the product and the ground. Please store both components prior to application at a minimum temperature of 15°C.

To achieve an optimal mixing of the components during injection, the inclusion of a static in-line mixer in connection with the mixing head is strongly recommended. The length of the static mixer should be approximately 32 cm.

Cleaning of injection equipment

For short breaks in the injection procedure, pump Part A through the in-line static mixer nozzle. After finishing the injection, pump an appropriate agent or oil which does not contain water through the pump and injection lines.

Storage

If stored in dry conditions, in unopened, tightly closed original containers and within a temperature range of +5°C and +35°C, the components of MasterRoc MP 364 Flex have a shelf life of 12 months.

Safety precautions

Refer to the Material Safety Data Sheet for safety measures:

MasterRoc MP 364 Flex Part A
MasterRoc MP 364 Flex Part B

Avoid contact with skin and eyes by using the required personal protective equipment, such as overalls, gloves and safety glasses. If contact with skin occurs, wash thoroughly using soap and water. If contact with eyes occurs, rinse thoroughly with an eyebath filled with water and seek medical advice. The products are harmless.

Uncured products should be prevented from entering local drainage systems and water courses. Spillage must be collected using absorbent materials such as sawdust and sand, and disposed of in accordance with local regulations.

The information given here is true, represents our best knowledge and is based not only on laboratory work but also on field experience. However, because of numerous factors affecting results, we offer this information without guarantee and no patent liability is assumed. For additional information or questions, please contact your local representative.

Headquarters:

BASF Construction Chemicals Europe Ltd
Global Underground Construction
Im Tiergarten 7, 8055 Zurich Switzerland
Phone +41 58 958 22 11
Fax +41 58 958 32 46

For more information: Visit us: www.ugc.basf.com Contact us: ugc@basf.com

BASF Construction Chemicals offices in Russia, Ukraine, Belarus

OOO "BASF Stroitelnye sistemy"
Moscow: +7 495 225 6436 St. Petersburg: +7 812 332 0412
Kazan: +7 843 212 5506 Krasnodar: +7 861 202 2299
Kiev: BASF T.O.V. +380 44 5915595 Minsk: +375 17 202 2471
E-mail: stroysist@basf.com www.master-builders-solutions.basf.ru

