



We create chemistry

9 | 09 67 23
Resinous
Flooring

Ucrete® DP Systems

Heavy Duty Polyurethane Basecoat for Ucrete DP Systems

PACKAGING

Part 1 and 2: 3 liter jugs filled to provide the proper ratio
Part 3 BC4: 28.7 lbs. (13 kg) bag or
Part 3 BC6: 38.1 lbs. (17.3 kg) bag or
Part 3 BC9: 54.6 lbs (24.8 kg) bag
Part 4: 1.1 lbs. (.5kg) pigment sachet
HP/Q Quartz Aggregate (equivalent to Filler F20)

SHELF LIFE

Part 1: 9 months when properly stored
Part 2: 1 year when properly stored
Part 3: 9 months when properly stored
Part 4: 2 years when properly stored

STORAGE

Store and transport in unopened container in a clean, dry area at stable temperatures approximating 40 to 86 °F (5 to 30 °C). Must be protected from frost.

COLORS

Ucrete colors: Red, Gray, Cream, Blue, Green, Charcoal

SUBSTRATE

• Over new and existing concrete surfaces and toppings; when applying over other substrates, contact BASF Technical Service.

WHERE TO USE

- Meat, Poultry and Seafood Plants
- Dairy Plants
- Meat, Poultry and Seafood Plants
- Beverage and Bottling Facilities
- Pharmaceutical Plants
- Commercial Kitchens and Restaurants
- Freezers and Coolers

LOCATION

- Wet conditions requiring a heavily texture slip resistant surface
- Some color instability in direct UV exposure
- Interior or exterior applications

YIELD

For coverage rates, refer to the Ucrete Contractor Installation Guideline

DESCRIPTION

Ucrete DP System is a flow applied mortar for use in Ucrete DP and Ucrete HPQ flooring systems. There are three Ucrete basecoat products:

- Basecoat BC4 for 3/16" Ucrete DP and HPQ floors
- Basecoat BC6 for 1/4" Ucrete DP and HPQ floors
- Basecoat BC9 for 3/8" Ucrete DP and HPQ floors

* Note: These are nominal system thicknesses based on the application methods and recommended broadcast quantities as outlined in the Contractor Installation Manual.

Ucrete Basecoat is BC4 and BC6 may also be used as a scratch coat primer under all Ucrete flooring systems.

Ucrete Basecoat is designed to be broadcasted by aggregate as part of the Ucrete DP and Ucrete HPQ flooring systems. It is not a finished floor in it's own right.

FEATURES	RESULTS
• Thermal stability	Resists steam or continuous hot-water
• Fast curing	Minimized down time
• Solvent free	Low odor; VOC compliant
• Can be applied to 7-10 day old concrete	Accelerates work schedules
• Chemical resistant	Tolerates organic and inorganic acids, alkalis and salts
• Unaffected by freeze/thaw cycles	Handles wide temperature fluctuations
• Wide temperature in-service range	Exceeds that of typical epoxy overlays
• Excellent impact abrasion and resistance	Handles heavy traffic
• For the use in facilities operating HACCP	Can be used in food and beverage facilities

Technical Data Composition

Ucrete DP Systems is a four-component polyurethane concrete system.

TEST DATA


PROPERTY	RESULTS	TEST METHOD
Compressive strength, psi (MPa)	7091 psi (48.9 MPa)	C579, Load rate 2/1
Tensile strength, psi (MPa)	1103 psi (7.6 MPa)	C307
Density, lb./ft³ (g/cm³)	124.9 lb. /ft ³ (2 g/cm ³)	
Compressive modulus, psi (MPa)	.0004 psi (3250 MPa)	BS 6319: Pt 6
Flexural strength, psi (MPa)	2663 psi (18.3 MPa)	C580
Water absorption	0	CP. BM2/67/2
Coefficient of thermal expansion	4x 10 ⁻⁵ °C ⁻¹	ASTM C531: Part 4.05

Chemical Resistance

Ucrete DP Systems offers exceptional resistance to a wide range of chemical aggressors. For example, Ucrete is resistant to the following commonly encountered chemicals

- Acetic Acid, 50%: Spirit vinegar is widely used in the food industry, indicative of resistant to vinegar, sauces, etc
- Concentrated Lactic Acid @ 140 °F (60 °C): Indicative of resistance to milk and dairy products.)
- Oleic Acids, 100% @ 140 °F (60 °C): Representative of the organic acids formed byoxidation of vegetables and animal fats widely encountered in the food industry.
- Concentrated Citric Acid: As found in citrus fruits and representative of the wider range offruit acids which can rapidly degrade other resin floors
- Methanol, 100%: Representative of alcohols and the wider range of solvents used in thepharmaceutical industry
- Resistant to a wide range of mineral oils, salts and inorganic acid

NOTE: Full chemical resistance is achieved after curing for 7 days. For chemical resistance to a specific compound, consult the Chemical Resistance Guide. Some staining or discoloration may occur with some chemicals, depending upon the nature of the spillage and the standards of housekeeping employed. Contact your local BASF representative for more information.

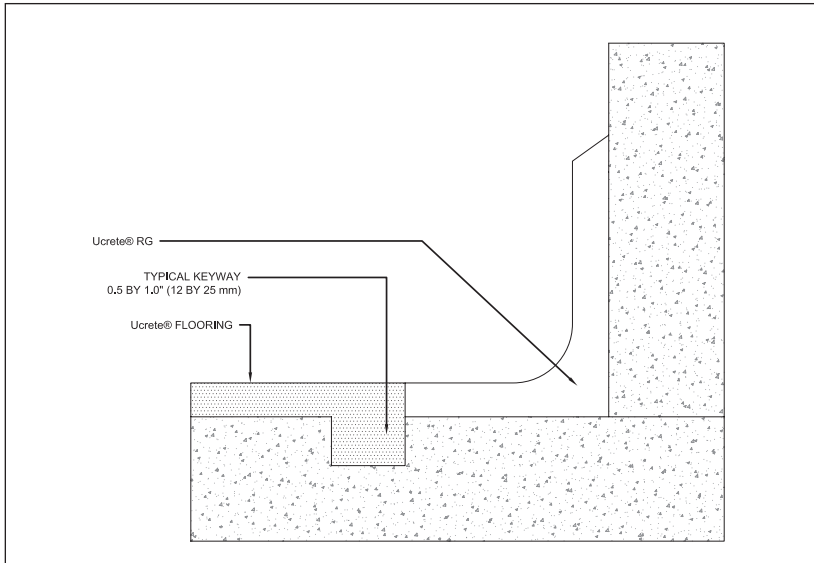

HOW TO APPLY

Ucrete systems are installed by approved contracting firms who have completed the manufacturer's training workshops. Ucrete is a globally branded product line with industry synergies around the world.

The following is only a summary of the installation techniques used by your Ucrete approved contractors. Refer to the Ucrete Contractor Installation Guideline for more information.

SURFACE PREPARATION

1. Floors must be structurally sound and properly cured. Test floor for vapor drive in accordance with ASTM D 4263 or ASTM F 1869.
2. Repair concrete as necessary.
3. Use commercial degreaser to clean floors of oil, grease and other bond-inhibiting materials.
4. Remove curing and parting compounds and other surface hardeners and floor coatings in accordance with the manufacturer's instructions.
5. Mechanical surface profiling is the method of surface penetration for both new and existing floors. Mechanically profile the floor to a minimum CSP 4-5 as described by the International Concrete Repair Institute.
6. Apply at least a 100 square foot test in an inconspicuous area that meets the owner's expectations for appearance, slip resistance, and performance.

PLANNING

The width of the bay should be wide enough to produce a strip of material that is minimum of 1.3' across the whole width of the bay for efficient use of the pin rake. The maximum bay widths are therefore:

For Basecoat B4, 25' for single mix, 50' for a double mix

For Basecoat B6, 19' for single mix, 36' for a double mix.

For Basecoat B9, 13' for single mix, 26' for a double mix.

PRIMING

The use of a primer is not normally necessary but has been shown to be beneficial in cold conditions or on porous concrete as it reduces resin absorption into the substrate, as well as, aids in application.

On rough substrates, and on substrates with large bleed run pores, it is recommended that a scratch coat primer (using Primer FS or Basecoat B4) is used to produce a smooth and sealed substrate for the application of the Basecoat to ensure the best aesthetic results.

The primer should be cured and dry to the touch before application of the body coat. If the time between coats exceeds the 48 hours, or if condensation or water impacts the surface, fully abrade the surface prior to overlaying.

APPLICATION

*Note: temperature is critical in the correct application of the Ucrete DP Basecoat systems. The air and substrate temperature during application should be above 54 °F (12 °C) for Basecoat B4, and 46 °F (8 °C) for Basecoat B6 and B9. When discharged from the mixer, the Basecoat should be at least 65 °F (18 °C).

1. Open jugs of Part 1, Part 2 and Part 4 liquid pigment pack.
2. Mix the 3 components using a mechanical mixer. The materials are supplied in pre-measured containers.
3. Add the powdered Part 3 and continue mixing for another 2-4 minutes (temperature dependent). Scrape sides at least once. Do not mix by hand.
4. Immediately discharge the product and place material on substrate to be coated. Mix subsequent batches immediately.
5. Spread the mix evenly over the substrate using a pin rake, with pins set to the appropriate depth. Use a steel trowel for edgework.
6. Use a spiked roller to produce a smooth even finish. The whole floor should be spike rolled twice. The first pass to assist with flow, and remove pin rake marks. The second pass, the roller should be held lightly on the surface to bring the resin to the surface.
7. The working life is approximately 10 minutes. Multiple units may be mixed, but do not mix more than can be applied in 10 minutes.

Note: If the Basecoat does not flow sufficiently and pin rake marks remain on the surface, even after spike rolling, try the following:

- Prime or scratch coat the substrate
- Raise or lower the material temperature
- Increase the mix time
- Increase thickness
- Raise the substrate or site temperature

Failure to address the problem will result in poor aesthetics, variable surface texture and sub standard finish.

BROADCAST

The basecoat must be flat and smooth prior to broadcasting. Imperfections in the surface of the Basecoat will be seen in the finished floor.

The time at which the Basecoat is scattered is critical:

- Too early, and the surface will become uneven
- Too late, and the aggregate will not penetrate
- It is essential that the broadcast is applied early enough to absorb into the surface.

At 68 °F (20 °C), the broadcast should be started after 10-15 minutes, so typically after a further two to three mixes of Basecoat have been applied. This will be reduced at higher temperatures, one to two mixes, and extended at lower temperatures, three to four mixes.

The HPQ is broadcast onto the curing Basecoat. If hand scattering is undertaken, care must be taken to ensure even scatter. Apply to the point of rejection or 1.5 lbs./ft² (7.3 kg/m²). Make sure the aggregate falls vertically onto the surface of the Basecoat, never throw the aggregate at the floor.

CURING TIME

Allow to cure overnight (typically 16 hours). Remove excess HPQ filler by brush and vacuum. Lightly abrade floor using a rotary sanding machine to remove partially adhered aggregate, to produce a uniform surface and reduce the coverage consumption rates for the topcoat. After sanding, vacuum the floor.

Apply the required clear or pigmented finishing coat to lock in the aggregate and obtain the desired profile.

FOR BEST PERFORMANCE

- The owner and architect should discuss joint details with the flooring contractor before the job starts.
- Substrates must be structurally sound, clean, dry, and free of any foreign matter that could inhibit adhesion.

- Do not apply directly to unreinforced sand cement screeds, asphalt or bitumen substrates, glazed tile or nonporous brick and tile, magnesite, copper, aluminum, existing coatings, epoxies, or polyesters. For optimal performance, apply directly to concrete. Consult with your Ucrete representative for advice.

- Ucrete DP system's variations in thickness will affect the system's thermal and impact resistance. Thicker systems will provide the highest level of thermal shock and impact resistance.

-BASF representatives and flooring specialists are available to assist you in the selection of the proper flooring system. Call 1-800-243-6739 for in-house and field technical assistance. -Make certain the most current versions of the product data sheets and MSDS are being used; call Customer Service (1-800-433-9517) to verify the most current versions.

- Proper application is the responsibility of the user. Field visits by BASF personnel are for the purpose of making technical recommendations only and not supervising or providing quality control on the jobsite.

HEALTH, SAFETY AND ENVIRONMENTAL

Read the Health, Safety and Environmental, understand and follow all Safety Data Sheets and product label information for this product prior to use. The SDS can be obtained by visiting www.master-builders-solutions.basf.us, e-mailing your request to basfbscst@basf.com or calling 1(800)433-9517. Use only as directed. For medical emergencies only, call ChemTrec® 1(800)424-9300.

LIMITED WARRANTY NOTICE

Every reasonable effort is made to apply BASF exacting standards both in the manufacture of our products and in the information which we issue concerning these products and their use. We warrant our products to be of good quality and will replace or, at our election, refund the purchase price of any products proved defective. Satisfactory results depend not only upon quality products, but also upon many factors beyond our control.

Therefore, except for such replacement or refund, BASF MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, INCLUDING WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE OR MERCHANTABILITY, RESPECTING ITS PRODUCTS, and BASF shall have no other liability with respect thereto. Any claim regarding product defect must be received in writing within one (1) year from the date of shipment. No claim will be considered without such written notice or after the specified time interval. User shall determine the suitability of the products for the intended use and assume all risks and liability in connection therewith. Any authorized change in the printed recommendations concerning the use of our products must bear the signature of the BASF Technical Manager

This information and all further technical advice are based on BASF's present knowledge and experience. However, BASF assumes no liability for providing such information and advice including the extent to which such information and advice may relate to existing third party intellectual property rights, especially patent rights. In particular, BASF disclaims all CONDITIONS AND WARRANTIES, WHETHER EXPRESS OR IMPLIED INCLUDING THE IMPLIED WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE OR MERCHANTABILITY. BASF SHALL NOT BE RESPONSIBLE FOR CONSEQUENTIAL, INDIRECT OR INCIDENTAL DAMAGES (INCLUDING LOSS OF PROFITS) OF ANY KIND. BASF reserves the right to make any changes according to technological progress or further developments. It is the customer's responsibility and obligation to carefully inspect and test any incoming goods. Performance of the product(s) described herein should be verified by testing and carried out only by qualified experts. It is the sole responsibility of the customer to carry out and arrange for any such testing. Reference to trade names used by other companies is neither a recommendation, nor an endorsement of any product and does not imply that similar products could not be used.

FOR PROFESSIONAL USE ONLY. NOT FOR SALE TO OR USE BY THE GENERAL PUBLIC.