


1
B-1066 **TYPICAL LAYOUT FOR SLAB REPAIR**
SCALE: N.T.S.

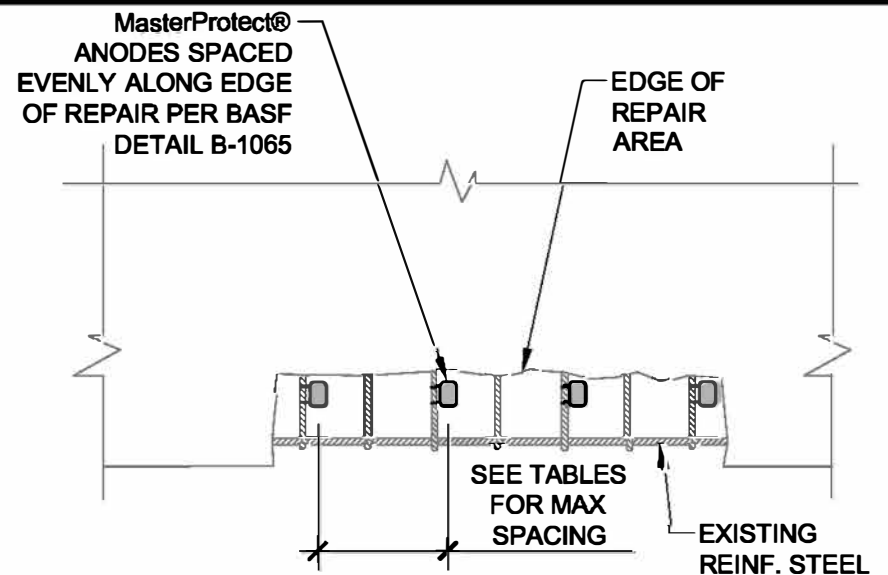

2
B-1066 **TYPICAL LAYOUT FOR SLAB EDGE REPAIR**
SCALE: N.T.S.

TABLE A - CORRODED BARS	
STEEL DENSITY RATIO	MAX. SPACING (IN)
<0.20	28
0.21 - 0.40	24
0.41-0.54	20
0.55 - 0.67	18
0.68 - 0.80	16
0.81 - 0.94	15
0.95 - 1.07	14
1.08 - 1.20	13

TABLE B - NON-CORRODED BARS	
STEEL DENSITY RATIO	MAX. SPACING (IN)
<0.30	30
0.31 - 0.60	28
0.61 - 0.90	26
0.91 - 1.20	22
1.21 - 1.50	20
1.51 - 2.00	17

NOTE: STEEL DENSITY RATIO IS THE RATIO OF STEEL REINFORCING BAR SURFACE AREA TO EXPOSED CONCRETE SURFACE AREA IN THE REPAIR ZONE.

CURRENT ISSUE DATE: 15 JAN 2014	DRAWN BY: WJG
DATE CREATED: 22 OCT 2013	CHECKED BY: WJG
DRAWING NO: B-1066	

STANDARD DETAIL
MasterProtect® Anodes
TYPICAL LAYOUT DETAILS

Information provided here is intended for informational purposes only. It is not intended to be used as a substitute for professional engineering or architectural services. The user assumes all liability for the use of this information. All trademarks contained herein are the property of their respective owners. All materials contained herein are provided by Company for informational purposes only. Company reserves the right to amend or withdraw any information contained in this literature without notice. All technical or other advice by Company, whether verbal or written, concerning products, or the use of products in specific situations, is given by Company and is used at the User's own risk.

BASF
We create chemistry
BASF Corporation
Construction Systems
889 Valley Park Drive
Shakopee, MN 55379

Customer Service: 800-443-9517
Technical Service: 800-243-6739
www.master-builders-solutions.basf.com

