


MasterTop DAP

High decorative image-based flooring system, smooth, matt finish

Application: as an innovative flooring system which puts stunning images onto floors, MasterTop DAP (Decorative Art Picture) can be used in commercial and public buildings, retail and fashion outlets, fitness & health studios, sports & leisure centers and restaurants.

| | | Consumption ca.: |
|--|--|-----------------------------|
| ■ | Primer | |
| | MasterTop P 604 (or P 617) yellowish, EP, 2 component, pre-filled | 0,3-0,5 kg/m ^{2*} |
| | Optional/ Sand broadcast | |
| | oven dried silica sand, size 0,3-0,8 mm, uniformly applied, not in excess | 0,8-1,0 kg/m ² |
| ■ | Optional/ Scratch primer | |
| | MasterTop P 604 (or P 617) filled 1 : 0,5 up to 1:1 with oven dried silica sand, size 0,1-0,3 mm | 0,6-2,0 kg/m ^{2*} |
| ■ | Body coat | |
| | MasterTop BC 372** pigmented, EP, 2 component, low emission, | 2,0-2,5 kg/m ² |
| ■ | Image | |
| | Decorative Art Picture self-adhesive picture/poster, pre-printed | 1,0 m ² |
| ■ | Encapsulating layer | |
| | MasterTop BC 308** colourless, EP, 2 component, non-solvented, glossy | 2,2-2,6 kg/m ² |
| ■ | Top coat | |
| | MasterTop TC 442W (transparent) colourless, PU, 2-component, water borne, non-solvented, UV-stable, matt | 0,12-0,15 kg/m ² |
| | Total thickness of the system | ca. 4,0-6,0 mm |

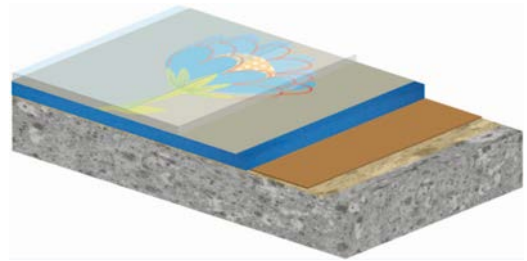

MasterTop DAP

High decorative image-based flooring system, smooth, matt finish

Remark: Consumptions are indicative and may be higher, depending on substrate roughness, temperature and porosity, as well as waste produced during application.

* Total consumption including sand

** Before, during and after application the material should be stored, used and allowed to cure at a minimum 18°C!

The flooring system fulfills, as minimum requirements, the following properties and technical data determined by internal and external testing:

EN 13813

SR-B1,5-AR1-IR4-Efl

CONTACT

Should you require any further information, please do not hesitate to contact your local sales consultant or take directly contact with us:


Performance Flooring

BASF Construction Chemicals Europe AG
Hardmatt 434
CH-5082 Kaisten
Tel: +41 62 868 93 60
Fax: +41 62 868 93 59

BASF Coatings GmbH
Donnerschweer Str. 372
D-26123 Oldenburg
Tel: +49 441 3402 251
Fax: +49 441 3402 333

Mitglied der



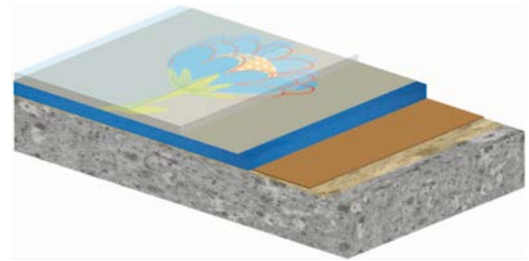


MasterTop DAP


High decorative image-based flooring system, smooth, matt finish

CE marking according to EN 13813

| | |
|---|-------------|
|  | |
| BASF Coatings GmbH Donnerschweer Str. 372, D-26123 Oldenburg | |
| 14 | |
| 122602 | |
| EN 13813: 2002 | |
| EN 13813: SR-B1,5-AR1-IR4 | |
| Synthetic resin screed for internal uses | |
| Essential characteristics | Performance |
| Fire behavior | Efl |
| Release of corrosive substances | SR |
| Water permeability | NPD |
| Wear resistance | < AR 1 |
| Bond strength | > B 1,5 |
| Impact resistance | > IR 4 |
| Impact sound insulation | NPD |
| Sound absorption | NPD |
| Heat insulation | NPD |
| Chemical resistance | NPD |
| Slip/Skid resistance | NPD |
| Emissions behavior | NPD |

NPD = No performance determined

Performance determined in System build-up **MasterTop DAP**

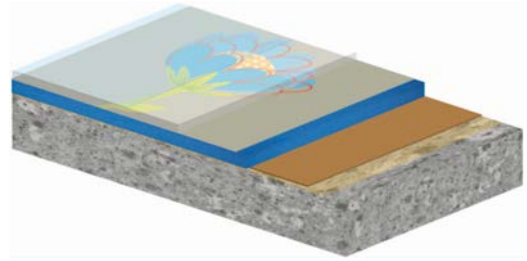

MasterTop DAP

High decorative image-based flooring system, smooth, matt finish

Disclaimer:

In view of widely varying site conditions and fields of application of our products, this technical data sheet is meant to provide general application guidelines only. This information is based on our present knowledge and experience. The customer is not released from the obligation to conduct careful testing of suitability and possible application for the intended use. The customer is obliged to contact the technical help-line for fields of application not expressly stated in the technical data sheet under "Fields of Application". Use of the product beyond the fields of application as stated in the technical data sheet without previous consultation with BASF and possible resulting damages are in the sole responsibility of the customer.

All descriptions, drawings, photographs, data, ratios, weights i.e. stated herein can be changed without advance notice and do not represent the condition of the product as stipulated by contract. It is the sole responsibility of the recipient of our products to observe possible proprietary rights as well as existing laws and provisions. The reference of trade names of other companies is no recommendation and does not exclude the use of products of similar type. Our information only describes the quality of our products and services and is no warranty. Liability is accepted for incomplete or incorrect particulars in our data sheets only in the event of intent or gross negligence, without prejudice to claims under product liability laws.